



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: A61M 5/30, A61M 5/20, A61M 5/315	A1	(11) International Publication Number: WO 00/10630 (43) International Publication Date: 02 March 2000 (02.03.2000)
(21) International Application Number: PCT/GB99/02586 (22) International Filing Date: 05 August 1999 (05.08.1999) (30) Priority Data: 9818110.0 19 August 1998 (19.08.1998) GB (60) Parent Application or Grant WESTON MEDICAL LIMITED [/]; (). WESTON, Terence, Edward [/]; (). GIBBINS, Graham, Roger [/]; (). NUSSEY, Matthew, Simon [/]; (). WESTON, Terence, Edward [/]; (). GIBBINS, Graham, Roger [/]; (). NUSSEY, Matthew, Simon [/]; (). ELKINGTON AND FIFE ; ().		Published
(54) Title: NEEDLELESS INJECTORS (54) Titre: INJECTEURS SANS AIGUILLE (57) Abstract A pressurised gas powered actuator comprising a piston (3) operating in a cylinder (1). The stroke of the piston (3) may be reduced by uncovering one or more holes (14, 20) in the cylinder wall to permit the escape of the pressurised gas at a predetermined position along the swept wall of the cylinder. Alternatively, the piston (401) may be connected to a rod (402) which has a gas vent (406) formed therein, the position of the rod (402) with respect to the piston (401) being variable to adjust the stroke of the piston (401). (57) Abrégé La présente invention concerne un actionneur à gaz pressurisé constitué d'un piston (3) qui se déplace dans un cylindre (1). La course du piston (3) peut être réduite par mise à jour d'un ou plusieurs orifices (14, 20) pratiqués dans la paroi du cylindre permettant l'échappement du gaz pressurisé à une position prédéterminée, située le long de la paroi du cylindre. Dans une autre réalisation, le piston (401), relié à une tige (402), présente, pratiqué à l'intérieur, un dispositif d'évacuation de gaz (406); la position de la tige (402), variable par rapport au piston (401), permet d'ajuster la course du piston (401).		

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61M 5/30, 5/20, 5/315		A1	(11) International Publication Number: WO 00/10630
			(43) International Publication Date: 2 March 2000 (02.03.00)
(21) International Application Number: PCT/GB99/02586 (22) International Filing Date: 5 August 1999 (05.08.99) (30) Priority Data: 9818110.0 19 August 1998 (19.08.98) GB (71) Applicant (for all designated States except US): WESTON MEDICAL LIMITED [GB/GB]; 2a Hales Barn Workshops, New Street, Stradbroke, Eye, Suffolk IP21 5JG (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): WESTON, Terence, Edward [GB/GB]; Thomlea, Pixey Green, Stradbroke, Eye, Suffolk IP21 5NG (GB). GIBBINS, Graham, Roger [GB/GB]; 1 Cricket Field View, Brundall, Norfolk NR13 5PH (GB). NUSSEY, Matthew, Simon [GB/GB]; 723 Worrall Road, Worrall, Sheffield S35 0AU (GB). (74) Agent: ELKINGTON AND FIFE; Prospect House, 8 Pembroke Road, Sevenoaks, Kent TN13 1XR (GB).			(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: NEEDLELESS INJECTORS			
(57) Abstract <p>A pressurised gas powered actuator comprising a piston (3) operating in a cylinder (1). The stroke of the piston (3) may be reduced by uncovering one or more holes (14, 20) in the cylinder wall to permit the escape of the pressurised gas at a predetermined position along the swept wall of the cylinder. Alternatively, the piston (401) may be connected to a rod (402) which has a gas vent (406) formed therein, the position of the rod (402) with respect to the piston (401) being variable to adjust the stroke of the piston (401).</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Description

5

10

15

20

25

30

35

40

45

50

55

NEEDLELESS INJECTORS

This invention relates to needleless injectors.

In International Patent Publication No. WO 95/03844, a needleless injector is disclosed. This is used to deliver liquid medicaments through a patient's skin by means of a high pressure jet of the medicament, generated by a piston pump. The energy for operating the pump may be derived from a coiled spring, pyrotechnic charge, hydraulic pressure, or pressurised gas.

Injectors are available using many different types of energy, and the energy may be supplied by the user, for example where a spring is manually compressed and latched to temporarily store the energy until it is required to "fire" the injector. Alternatively, the injector may be supplied having the energy already stored - for instance by means of a pre-compressed spring, or pyrotechnic charge.

Some injectors are intended for disposal after a single use, whereas others have a re-loadable energy storage means and a disposable medicament cartridge, and there are many combinations to suit particular applications and markets. For the purposes of the present disclosure, the term "actuator" will be used to describe the energy storage and release mechanism, whether or not it is combined with the medicament cartridge. In all cases, it is necessary to arrange for sufficient force at the end of the piston stroke to deliver all of the medicament at the required pressure: if a spring is used, this is called "pre-loading".

There is a need to deliver different volumes of medicament according to a patient's age, weight, and factors relating to the condition being treated, and some single use injectors, such as that disclosed in US-A-4913699 (Parsons), may be capable of delivering different volumes because the user must first fill the injector by using a co-operating medicament transfer device, by which means medicament is transferred from a bulk storage vial into the injection cartridge. Thus the user is able to vary the fill volume and hence the dispensed volume. However these injectors, whilst superficially simple, require the use of the transfer device, which is complicated and difficult to sterilise, and the aseptic transfer of medicament is almost impossible to achieve routinely. Furthermore, to the present inventors' knowledge, no prior art single use injectors are known which have an actuator mechanism for

5 varying the energy release to suit the amount to be dispensed.

There are more complex re-usable injectors such, as those sold by the MediJect Corporation, in which the actuator may be adjusted to vary the energy release, but these too suffer most of the same fundamental problems as Parson's injector.

10 One preferred embodiment in WO 95/03844 is a coil spring powered injector having adjustments for the delivered volume, but even this improvement over the prior art is somewhat complicated to manufacture and operate. Other embodiments in that application describe gas spring powered actuators. (A gas spring comprises a cylinder and piston, with pressurised gas urging the piston which is temporarily restrained by a latch mechanism). A gas spring has several advantages over a coiled spring: in particular, a much higher energy storage density is possible, and at the end of the piston stroke, residual gas may be easily released through an opening in the cylinder wall. This latter point is important to ensure the safe disposal of the injector after use. In the case of a coiled spring-powered actuator, it would require a complicated mechanism to automatically unload the residual energy stored in the spring at the end of its stroke.

15 20 25 30 Whilst needleless injectors have great potential in reducing pain and fear of needles, and in reducing cross-infection, their high cost compared with a conventional syringe has mitigated against their widespread use, and this is particularly so in relation to injectors which are required to deliver a variable dose.

35 According to the present invention there is provided an actuator for a gas-powered needleless injector, comprising a drive member movable through a stroke to cause a substance to be delivered by the injector; means for creating a gas pressure on the drive member to cause it to move through the stroke; means for venting the gas pressure after the drive member has travelled through its stroke; and means for adjusting the effective location of the venting means, thereby to adjust the stroke.

40 45 50 A particularly preferred embodiment is an actuator employing a gas spring, as described above, but having a stroke which is easily adjustable in small increments. This is achieved by having a series of valves along the cylinder, so that by opening a particular valve, the pressurised gas driving the piston escapes rapidly through the valve, causing the piston to stop. Although the piston will have some

5 momentum, in a damped system, which a needleless injector is, the damping and friction will reduce any overtravel to insignificant proportions.

10 In a first embodiment, a cylinder closed at one end contains a piston which seals and slides against the internal surface of the cylinder. Pressurised gas is contained between the closed end of the cylinder and the piston and urges the piston towards the open end of the cylinder. The piston is temporarily restrained from
15 moving by a latch, operable by a cooperating sliding trigger sleeve. A series of holes aligned longitudinally in the wall of the cylinder between the sealing part of the piston and the open end of the cylinder are covered and sealed by a sleeve slidable over the outside of the cylinder. By moving the sleeve longitudinally the holes may be
20 progressively uncovered, so that when the latch is operated to release the piston, the piston travels in the cylinder bore towards the open end, until the sealing part of the piston passes an uncovered hole, whereupon the pressurised gas escapes rapidly through the hole, and the piston quickly stops. The sliding sleeve has a ratchet or
25 detent to enable the user to preset the sleeve accurately prior to firing the actuator.

In a second embodiment, there is provided an actuator comprising a piston and
30 cylinder as previously described, but having the sliding sleeve movable helically along the outside of the cylinder. In this embodiment the holes through the cylinder wall may also be placed on a helical centreline, so that smaller increments of adjustment are possible.

35 In yet other embodiments, the piston is connected to a venting member, preferably a rod, which has a vent formed therein, the position of the rod with respect to the piston being variable to adjust the stroke of the piston.

40 In all embodiments it is desirable that the position of the adjusting means is identified to enable the user to preset the dose.

45 The effect of shortening the stroke of the piston is to reduce the volume of medicament dispensed from the medicament cartridge, because the piston within the medicament cartridge will also have its stroke reduced. Thus there will be some medicament remaining in the cartridge at the end of the injection. For most
50 medicaments this is unimportant, and in any case, pharmaceutical vials usually contain an excess of the drug required.

55 Although a gas spring is preferred it is alternatively possible for the gas

5 pressure to be created by a container of gas or vaporisable liquid arranged to apply gas pressure to the drive member upon operation of the actuator.

10 Details of preferred embodiments of the invention will now be described with reference to the following drawings:

15 Figure 1 shows a longitudinal section through a first embodiment of a gas-powered actuator for a needleless injector, employing a longitudinally sliding sleeve for adjusting the piston stroke. (Attention is drawn to International Patent Publication No. WO 97/37705 which is incorporated herein by reference, for a full description of the injector and its operation).

20 Figures 2 and 3 are details of a ratchet co-operating with the sliding sleeve, used in the first embodiment;

Figure 4 shows part of the exterior of the first embodiment including a dose indicator;

25 Figure 5 is a longitudinal section through part of a second embodiment, before firing, having rotary means for adjusting the dose;

Figure 6 shows the actuator of Figure 5 after firing;

30 Figure 7 shows a gas cylinder forming part of the second embodiment, with a helical thread for engagement with an adjustment knob;

Figure 8 is a perspective view of the second embodiment, showing particularly the adjustment knob and dose marking;

35 Figures 9 to 11 show a third embodiment, with Figures 9 and 10 showing the actuator adjusted for two different doses, before firing, and Figure 11 showing the actuator after firing; and

Figure 12 shows a fourth embodiment, after firing.

40 Referring to Figure 1, the actuator comprises a gas cylinder 1 closed at one end and having an opening at the other end defined by a flange 2. A piston 3 is a sliding fit in the cylinder 1, and carries a seal 4 in sliding contact with the internal cylinder wall. Referring also to Figure 3, the actuator may be provided with a coupling 5, having a screwthread 6, for connecting it to a medicament cartridge 30 having a cooperating screwthread. The cartridge has piston 31 slidably received therein, and an outlet orifice 32, and between the piston 31 and orifice 32 it is filled with a substance 33 to be delivered by the injector, e.g. a medicament in liquid form.

45

50

55

5 The lower end of the cartridge is sealed by a member 34 which can be broken off at a frangible connection 35 prior to use.

10 One or more lugs 7 are crimped onto the flange 2 of gas cylinder 1 to retain it. Between its closed end and the seal 4 the gas cylinder is filled with pressurised gas or a mixture of pressurised gas and liquid vaporisable to provide further pressurised gas. This urges the piston 3 in the direction of arrow W. The piston 3 is temporarily restrained by a latch 9 which reacts against a support face 10 on a coupling 5. The latch 9 engages with a cam face 11 in piston 3, so that the force on the piston in the direction of arrow W produces a side thrust on latch 9 in the direction of arrow Z. This has the effect of trying to disengage the latch 9 from the piston 3, thus firing the actuator, but this action is prevented by the inner wall of an operating sleeve 12. When the operating sleeve 12 is moved in the direction of arrow W relative to the assembly of gas cylinder 1 and coupling 5, an aperture 13 in the wall of operating sleeve 12 becomes juxtaposed with the latch 9, permitting the latch 9 to disengage from the piston 3. This is the principle of operation more fully described in International Patent Publication No. WO 97/37705, incorporated herein by reference, but it is alternatively possible to employ other triggering mechanisms designed for a specific application. After disengagement of the latch, the piston 3 strikes the piston 31, causing the latter to dispense a dose of the substance 33 through the orifice 32.

35 Referring particularly to Figure 2, the cylinder 1 has a series of vent holes 14 located in a longitudinally extending row and perforating the wall of cylinder 1. (The positions of the holes are also indicated in Figure 1, but it must be understood that the holes are in the cylinder 1 not, as might be thought from Figure 1, in the piston 3.) A valve sleeve 15 is slidable along the outside of cylinder 1, and also makes reasonable sealing contact with the holes. A pawl 17 on the lower end of the valve sleeve 15 engages with a ratchet 16 which is crimped together with the cylinder 1 by lugs 7 on coupling 5. Thus, by sliding the valve sleeve 15 in the direction of arrow S relative to the assembly of cylinder 1 and coupling 5, the valve sleeve 15 may be moved incrementally to increase the number of holes 14 in the wall of the gas cylinder 1 which are uncovered, but not vice versa. Of course, if a one-way adjustment is not required, then the toothform of the ratchet 16 and pawl 17 may be

5 changed to provide a detent function only.

10 The topmost hole 14a in the wall of the cylinder 1 may be used for filling the cylinder 1 with compressed gas. The piston is first located in the cylinder 1 so that the seal 4 is just below the hole 14a (below as in the orientation of the drawings), and the pressurised gas 8 is introduced through the hole 14a in the space between the seal 4 and the closed end of the cylinder 1. The piston 3 is pushed further into the cylinder 1 until the latch 9 can engage in the slot 18 in the piston 3. With the ratchet disengaged by a suitable tool, the valve sleeve 15 is then pushed to the position shown in Figure 1 so that all the holes 14 are sealed except for hole 14b.

15 If the user then operates the actuator by acting on operating sleeve 12, at the end of the piston stroke the seal 4 passes hole 14b, and the residual pressurised gas 8 escapes through the hole 14b. If, however, the sleeve has previously been adjusted to some intermediate position, then when the seal 4 passes the topmost hole uncovered, the gas 8 will escape through that hole and the piston 3 will stop. Figure 4 shows the exterior of part of the actuator, and illustrates how the valve sleeve 15 may have an operating knob 19 which may also serve as a dose indicator against markings on the outside of the operating sleeve 12.

20 Figures 5-8 show an actuator of similar construction but having rotary means to vary the stroke. In this embodiment, holes 20 are arranged in a helix to give smaller increments of stroke adjustments (but could be arranged linearly as in the first embodiment). Valve sleeve 15 terminates in a knob 22, and the inside of the sleeve 15 has a female screw thread, which co-operates with a male screw thread 21 on the gas cylinder 1. Screw thread 21 may be a separate part which is swaged or crimped on to the cylinder 1. The rotary motion of valve sleeve 15 is translated to linear movement and progressively uncovers the holes 20. When the actuator is operated, the stroke of the piston 3 is terminated at the uppermost uncovered hole 20 when the gas escapes through the said hole.

25 A third embodiment of the invention will now be described with reference to Figures 9 to 11. Referring first to Figure 9, a ram 401 is attached by screw threads 403 to a hollow adjusting rod 402, and the ram and rod are assembled into a gas cylinder 409. The cylinder 409 contains a pressurised gas 414, such as nitrogen, or a mixture of pressurised gas and vapourisable liquid, which is prevented from escaping

5 by a ram seal 410 and a rod seal 405, the latter being sealingly attached to the gas
cylinder 409. The assembly of the ram 401, seal 410, and rod 402 is free to slide
longitudinally in the bore of the cylinder 409, and therefore the pressurised gas urges
10 the ram 401 in the direction of arrow A. The ram is temporarily prevented from
movement by a latch (not shown) engaged in a slot 413, operable by a trigger release
mechanism configured to suit the application (not shown).

15 The rod 402 is hollow, and has a plug 404 sealingly assembled therein to
prevent the escape of the pressurised gas 414 through the hollow rod 402 via the
threads 403. A hole 406 perforates the wall of the hollow adjusting rod 402, and the
bore of the hollow adjusting rod 402 is open to the atmosphere at 416. The assembly
20 of the cylinder 409 and ram 402 is housed within the sleeve 415. An adjustment
knob 407 is free to rotate on the end of the sleeve 415, and is retained thereon by a
detent 412. Part of the rod 402 is deformed to form a key 408 which is free to slide
within a cooperating groove in the knob 407. Thus, when the knob 407 is rotated,
25 the rod 402 is rotated with it, and the rod 402 will be screwed into or out of the ram
401. The ram is prevented from rotating with the rod 402 by the trigger latch or
other location means, or alternatively the friction of the seal 410 on the bore of
cylinder 409 may be sufficient to prevent rotation.

30 Referring to Figure 10, the effect of rotating the adjustment knob 407 may be
seen, i.e. the rod 402 is screwed further into the ram 401, and the hole 406 is closer
to the seal 405. The stroke of the ram is indicated by the position of the graduations
35 411 relative to the end face of the adjusting knob 407.

Referring to Figure 11, the latch has been disengaged from the trigger slot 413
40 in the ram 401, allowing the pressurised gas 414 to move the ram and rod assembly
in the direction of arrow A. When the hole 406 passes through the seal 405, it enters
the inside of the cylinder 409 and allows the pressurised gas to escape via the bore
of the hollow adjusting rod and to atmosphere through the open end at 416. Since
45 there is now no motive force available from the gas, the ram stops almost
immediately, dependent on the flow rate of the pressurised gas through the hole 406
and bore of the hollow rod 402. Thus, by adjusting the position of the hole 406
relative to the seal 405, the stroke of the ram and hollow rod assembly may be
50 varied.

5 Figure 12 shows a fourth embodiment in an operated position corresponding to Figure 11 for the third embodiment. The fourth embodiment is similar to the third, but in this case a solid rod 402a replaces the hollow rod previously described, and the hole 406 is replaced by a bypass groove or flat 416a. When the rod 402a is in the position shown, the pressurised gas 414 escapes through the bypass groove 416a to atmosphere via vent 417.

10 The foregoing examples show that the addition of very few components to a simple gas powered actuator can provide stroke adjustment together with safe escape of residual pressurised gas at the end of actuation.

Claims

5

10

15

20

25

30

35

40

45

50

55

CLAIMS:

1. An actuator for a gas-powered needleless injector, comprising a drive member movable through a stroke to cause a substance to be delivered by the injector; means for creating a gas pressure on the drive member to cause it to move through the stroke; means for venting the gas pressure after the drive member has travelled through its stroke; and means for adjusting the effective location of the venting means, thereby to adjust the stroke.

2. An actuator according to claim 1, wherein the venting means comprises a plurality of vent openings arranged at different distances along the stroke, and the adjusting means comprises a member for determining which of the vent openings is the effective venting means.

3. An actuator according to claim 2, wherein the said member of the adjusting means is a sleeve movable to selectively seal or expose given vent openings.

4. An actuator according to claim 3, wherein the vent openings are arranged in a line parallel to the direction of movement of the drive member.

5. An actuator according to claim 3, wherein the vent openings are arranged along a helical line.

6. An actuator according to any one of claims 3 to 5, wherein a plurality of possible locations for the sleeve are defined by a detent system.

7. An actuator according to any one of claims 3 to 5, wherein a plurality of possible locations for the sleeve are defined by a ratchet system, whereby the sleeve is movable in use only in one direction.

8. An actuator according to any one of claims 3 to 5, wherein the adjusting means includes a rotatable knob, connected to the sleeve, and the adjusting means

5 further comprises a screwthread system for converting rotational movement of the knob into linear movement of the sleeve.

10 9. An actuator according to claim 1, wherein the venting means comprises a venting member movable with the drive member, and the adjusting means comprises means for adjusting the longitudinal position of the venting member with respect to the drive member.

15 10. An actuator according to claim 9, wherein the venting member is a hollow rod having a wall through which a vent opening extends, the longitudinal position of the hollow rod being adjustable so that at the end of stroke of the drive member the gas pressure is vented via the vent opening and the interior of the hollow rod.

20 11. An actuator according to claim 9, wherein the venting member is a rod with a bypass formed therein, the longitudinal position of the rod being adjustable so that at the end of the stroke of the drive member the gas pressure is vented via the bypass.

25 12. An actuator according to any one of claims 9 to 11, wherein the venting member is connected to the drive member by a screwthread, and the adjusting means comprises means for rotating the venting member with respect to the drive member to adjust the longitudinal position of the venting member with respect to the drive member.

30 13. An actuator according to claim 12, wherein the said venting member is longitudinally slidable with respect to the said rotating means, whereby to permit the drive member to move longitudinally with respect to the rotating means during the stroke of the drive member.

35 40 14. An actuator according to any preceding claim, wherein the means for creating a gas pressure is a gas cylinder in which the drive member is received for movement during its stroke, a latch arrangement being provided to prevent movement of the drive member prior to operation of the actuator.

5 15. An actuator according to any one of claims 1 to 13, wherein the means for
 creating a gas pressure is a container of gas or vaporisable liquid arranged to apply
10 gas pressure to the drive member upon operation of the actuator.

15 16. An actuator according to any preceding claim, wherein the drive member is
 arranged to strike a dispensing piston after the drive member has travelled through
20 part of its stroke, and thereafter to cause the dispensing piston to dispense the said
 substance from the injector, while the drive member completes its stroke.

5

10

15

20

25

30

35

40

45

50

55

1/7

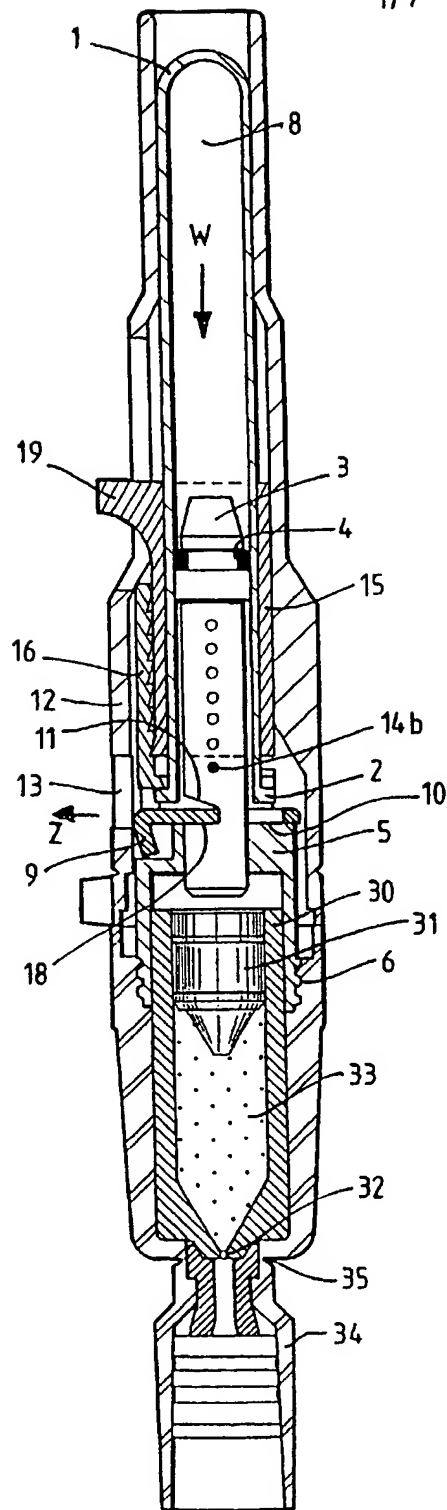
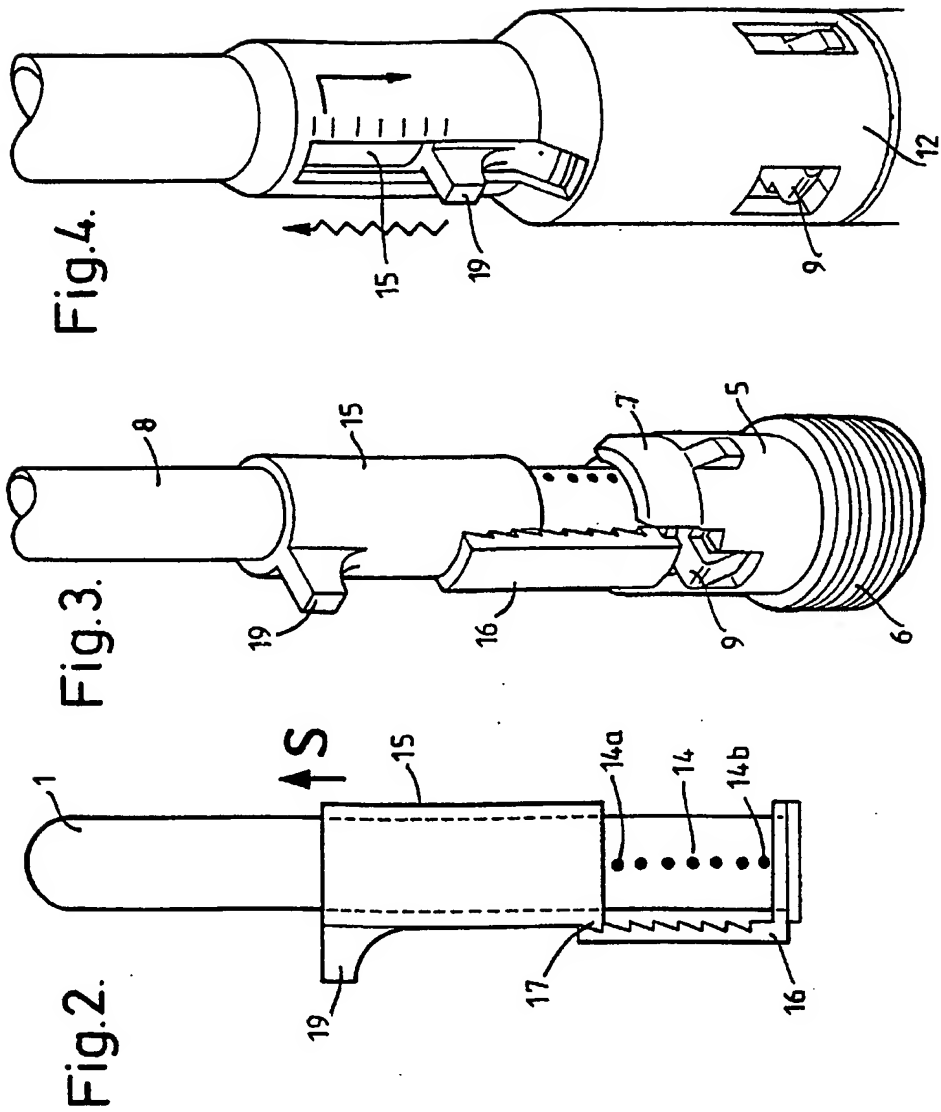


Fig.1.



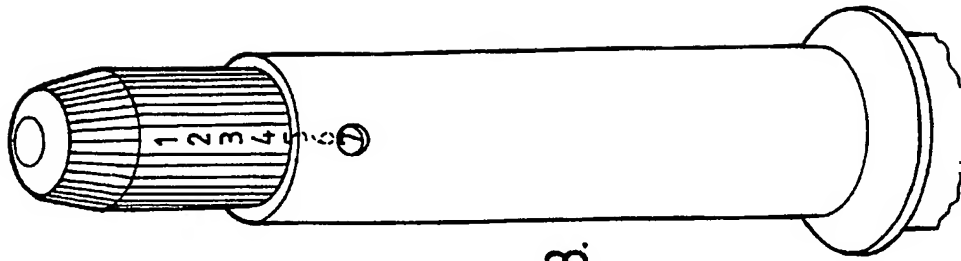


Fig. 8.

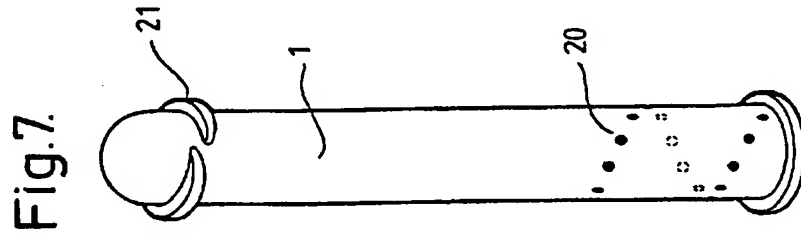


Fig. 7.

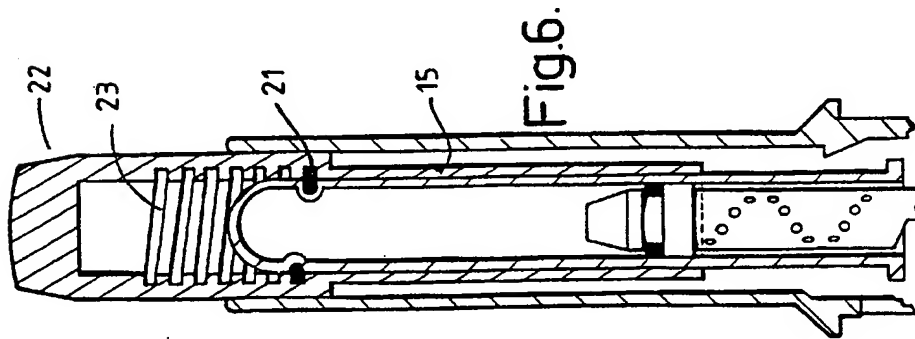


Fig. 6.

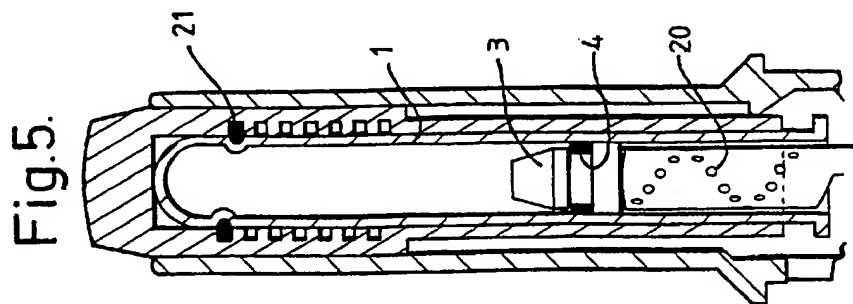


Fig. 5.

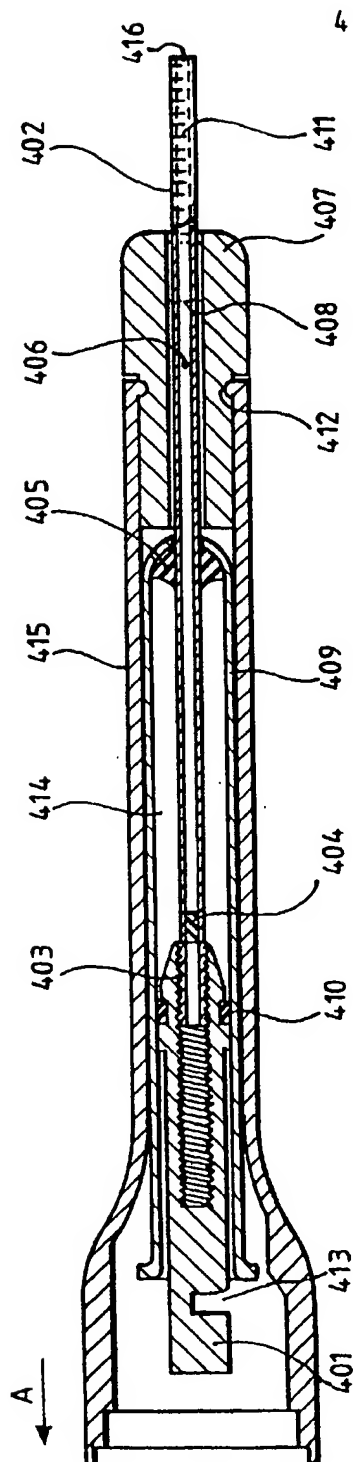


Fig.9.

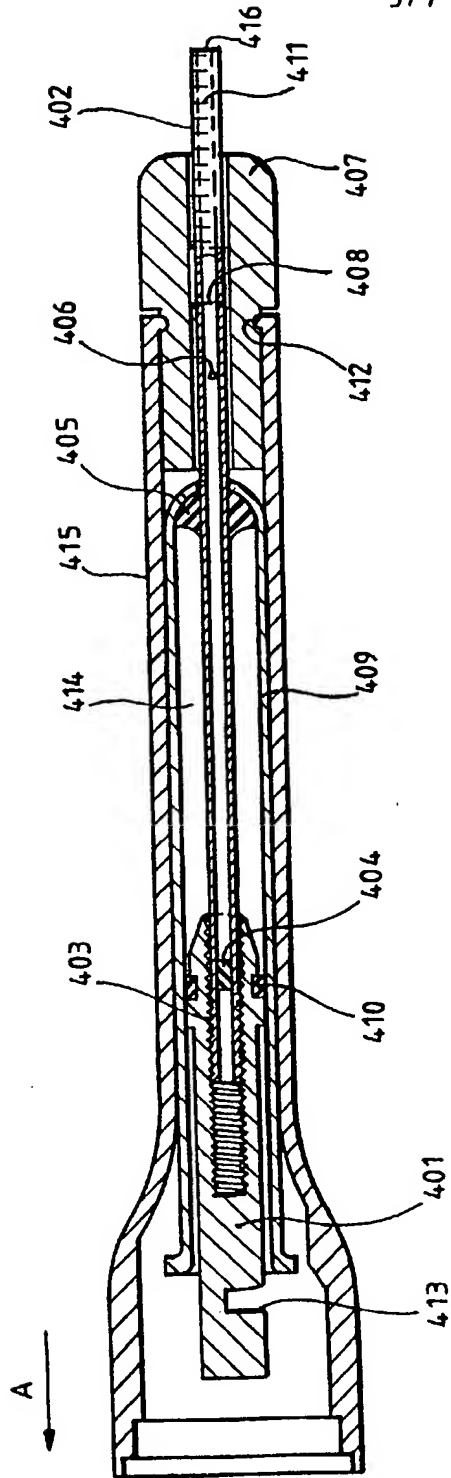


Fig.10.

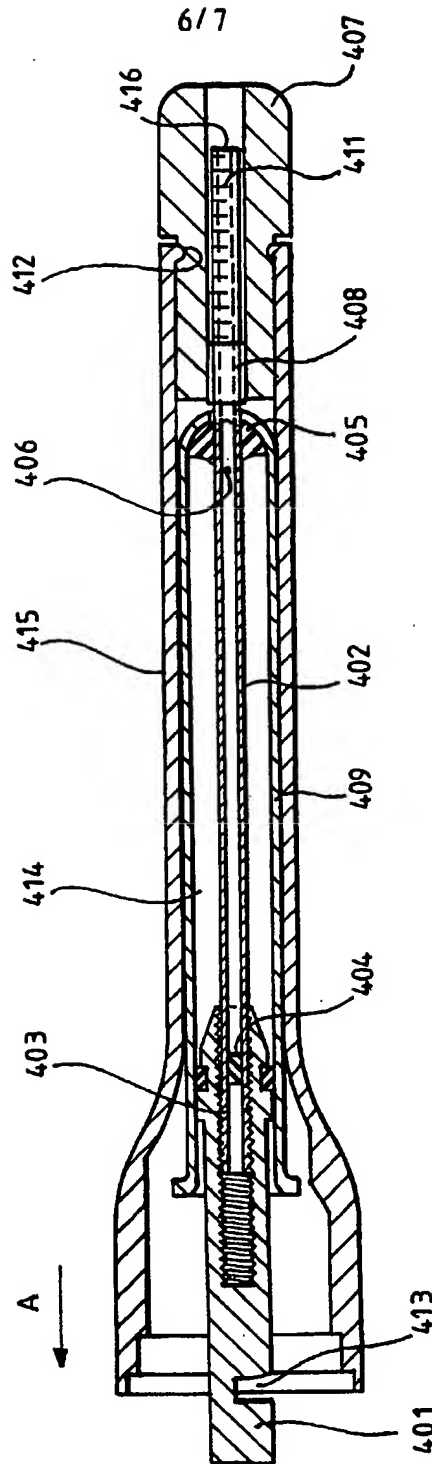


Fig.11.

7 / 7

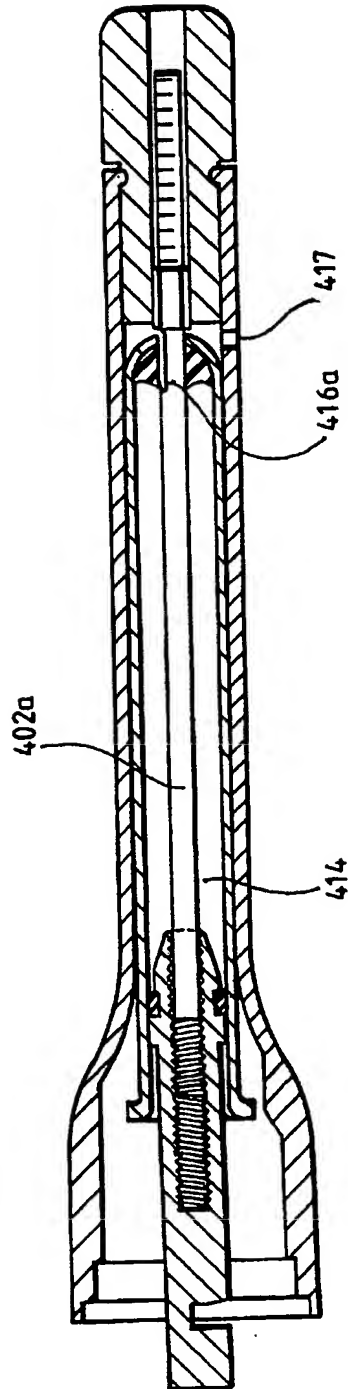


Fig.12.

INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/GB 99/02586

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61M5/30 A61M5/20 A61M5/315		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 605 763 A (SMOOT JOHN H) 5 August 1952 (1952-08-05) column 2, line 14 -column 9, line 2; figures 1-12	1, 15, 16
A	US 2 680 439 A (SUTERMEISTER ARNOLD K) 8 June 1954 (1954-06-08) column 4, line 64 -column 5, line 35; figures 5, 6	1, 15
A	WO 95 03844 A (WESTON MEDICAL LTD; WESTON TERENCE E) 9 February 1995 (1995-02-09) cited in the application page 20, line 28 -page 21, line 38; figures 11-11B	1, 14-16
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "A" document member of the same patent family		
Date of the actual completion of the international search 20 December 1999		Date of mailing of the international search report 11/01/2000
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 eponi, Facs (+31-70) 340-3016		Authorized officer Levert, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 99/02586

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2605763 A	05-08-1952	GB 669053 A	
US 2680439 A	08-06-1954	NONE	
WO 9503844 A	09-02-1995	AU 7233194 A	28-02-1995
		BR 9407156 A	17-09-1996
		CA 2167586 A	09-02-1995
		EP 0710130 A	08-05-1996
		EP 0834330 A	08-04-1998
		NO 960395 A	27-03-1996
		US 5891086 A	06-04-1999
		ZA 9405641 A	29-01-1996